

SIMATIC S7-400



6/2	SIPLUS central processing units
6/2	SIPLUS CPU 417H
6/3	SIPLUS sync module

6/4	SIPLUS analog modules
6/4	SIPLUS SM 431 analog input modules

Brochures

For brochures serving as selection guides for SIMATIC products refer to:

[http://www.siemens.com/simatic/
printmaterial](http://www.siemens.com/simatic/printmaterial)

SIMATIC S7-400

SIPLUS central processing units

SIPLUS CPU 417H

Overview



CPU for SIMATIC S7-400H and S7-400F/FH

- For use in S7-400H fault-tolerant systems
- Can be used with F-Runtime license as fail-safe CPU in safety-related S7-400F/FH systems
- With integral PROFIBUS DP master interface
- With 2 plug-in slots for sync modules

For further technical documentation on SIPLUS, see:
<http://www.siemens.com/siplus-extreme/techdoku>

Environmental conditions	SIPLUS extreme																												
Ambient temperature range	-40/-25 to +60 °C																												
Relative humidity	100% Dewing, condensation and icing permissible																												
Contaminant concentration	EN60721-3-3 3C4 and ISA S71.04 G1, G2, G3, GX ¹⁾ <table> <thead> <tr> <th></th> <th>Constant load</th> <th>Limil value²⁾</th> </tr> </thead> <tbody> <tr> <td>SO₂</td> <td>4.8 ppm</td> <td>17.8 ppm</td> </tr> <tr> <td>H₂S</td> <td>9.9 ppm</td> <td>49.7 ppm</td> </tr> <tr> <td>Cl</td> <td>0.2 ppm</td> <td>1.0 ppm</td> </tr> <tr> <td>HCl</td> <td>0.66 ppm</td> <td>3.3 ppm</td> </tr> <tr> <td>HF</td> <td>0.12 ppm</td> <td>2.4 ppm</td> </tr> <tr> <td>NH</td> <td>49 ppm</td> <td>247 ppm</td> </tr> <tr> <td>O₃</td> <td>0.1 ppm</td> <td>1.0 ppm</td> </tr> <tr> <td>NO_x</td> <td>5.2 ppm</td> <td>10.4 ppm</td> </tr> </tbody> </table> At RH < 75%, condensation permitted			Constant load	Limil value ²⁾	SO ₂	4.8 ppm	17.8 ppm	H ₂ S	9.9 ppm	49.7 ppm	Cl	0.2 ppm	1.0 ppm	HCl	0.66 ppm	3.3 ppm	HF	0.12 ppm	2.4 ppm	NH	49 ppm	247 ppm	O ₃	0.1 ppm	1.0 ppm	NO _x	5.2 ppm	10.4 ppm
	Constant load	Limil value ²⁾																											
SO ₂	4.8 ppm	17.8 ppm																											
H ₂ S	9.9 ppm	49.7 ppm																											
Cl	0.2 ppm	1.0 ppm																											
HCl	0.66 ppm	3.3 ppm																											
HF	0.12 ppm	2.4 ppm																											
NH	49 ppm	247 ppm																											
O ₃	0.1 ppm	1.0 ppm																											
NO _x	5.2 ppm	10.4 ppm																											
Saline fog	Saline fog test (EN 60068-2-52)																												
Mechanically active substances	EN60721-3-3 3S4																												
• Dust (suspended substance content)	4.0 mg/m ² h																												
• Dust (precipitation)	40 mg/m ² h incl. conductive sand/dust ("Arizona dust")																												
Biologically active substances	EN60721-3-3 3B2 Mildew growth, Fungus, excluding fauna																												

¹⁾ ISA -S71.04 severity level GX from October 2010

²⁾ 30 min/day

SIPLUS CPU 417-4H

Order No.	6AG1 417-4HT14-4AB0
Order No. based on	6ES7 417-4HT14-0AB0
Ambient conditions	Resistant in accordance with EN60721 to chemically (-3C4), mechanically (-3S4) and biologically (-3B2) active substances and compliant with ISA S71.04 G1, G2, G3, GX ¹⁾ . For further information, refer to Environmental conditions of SIPLUS extreme (on this page) or go to www.siemens.com/siplus-extreme
Technical data	The technical data of the standard product apply with the exception of the environmental conditions.

¹⁾ ISA -S71.04 severity level GX from October 2010

Ordering data

Order No.

SIPLUS CPU 417-4H	C	6AG1 417-4HT14-4AB0
(Medial exposure) for S7-400H and S7-400F/FH; 30 MB work memory, MPI/PROFIBUS DP master interface, 2 slots for sync modules, slot for memory card, incl. slot number plates		
Accessories	see S7-400 central processing units, catalog ST 70 · 2009, page 5/46	


C: Subject to export regulations: AL: N and ECCN: EAR99H

SIMATIC S7-400

SIPLUS central processing units

SIPLUS sync module

Overview

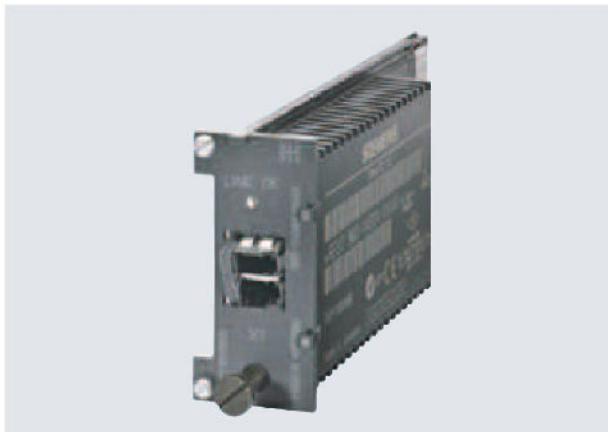

- For interfacing the two CPU 414-4H/417-4H devices in the subunits of the S7-400H
- Pluggable directly into the CPU

For further technical documentation on SIPLUS, see:
<http://www.siemens.com/siplus-extreme/techdoku>

SIPLUS sync module (up to 10 m)

Order No.	6AG1 960-1AA04-4XA0
Order No. based on	6ES7 960-1AA04-0XA0
Ambient conditions	Resistant in accordance with EN60721 to chemically (-3C4), mechanically (-3S4) and biologically (-3B2) active substances and compliant with ISA S71.04 G1, G2, G3, GX ¹⁾ . For further information, refer to Environmental conditions of SIPLUS extreme (on page 6/2) or go to www.siemens.com/siplus-extreme
Technical data	The technical data of the standard product apply with the exception of the environmental conditions.

¹⁾ ISA -S71.04 severity level GX from October 2010

Ordering data

	Order No.
SIPLUS sync module (Medial exposure) for coupling the CPU 41xH for S7-400H/F/FH; 2 modules required per CPU; for 6ES7 412-3HJ14-0AB0, 6ES7 414-4HM14-0AB0 and 6ES7 417-4HT14-0AB0; for patch cable, can be used for fiber-optic cables up to 10 m in length	6AG1 960-1AA04-4XA0
Accessories	see S7-400 sync module, catalog ST 70, page 5/56

SIMATIC S7-400

SIPLUS analog modules

SIPLUS SM 431 analog input modules

Overview



6

- Analog inputs for SIMATIC S7-400
- Connecting voltage sensors and current sensors, thermo elements, resistors and resistance thermometers
- Resolution 13 to 16 bit

For further technical documentation on SIPLUS, see:
<http://www.siemens.com/siplus-extreme/techdoku>

SIPLUS SM 431 analog input modules		
Order No.	6AG1 431-0HH00-4AB0	6AG1 431-1KF20-4AY0
Order No. based on	6ES7 431-0HH00-0AB0	6ES7 431-1KF20-0AB0
Ambient conditions	Resistant in accordance with EN60721 to chemically (-3C4), mechanically (-3S4) and biologically (-3B2) active substances and compliant with ISA S71.04 G1, G2, G3, GX ¹⁾ . For further information, refer to Environmental conditions of SIPLUS extreme (on page 6/2) or go to www.siemens.com/siplus-extreme	
Technical data	The technical data of the standard product apply with the exception of the environmental conditions.	

¹⁾ ISA -S71.04 severity level GX from October 2010